


## OLED Desktop Embedded Transparent Display

Product Model: RK-O77-QTGA



- ◆ OLED self-emissive technology for vibrant and lush color representation
- ◆ Transparent emission for flawless display of image quality
- ◆ Ultra-high contrast ratio, delivering exceptional depth in imagery—pure blacks and brilliant whites
- ◆ Ultra-fast refresh rate for lag-free visuals and eye care
- ◆ No backlight, eliminating light leakage and seepage
- ◆ Supports a 178° ultra-wide viewing angle
- ◆ Supports multiple board expansions, such as Android X86 motherboard configurations
- ◆ Large 77-inch transparent display for a top-tier visual impact

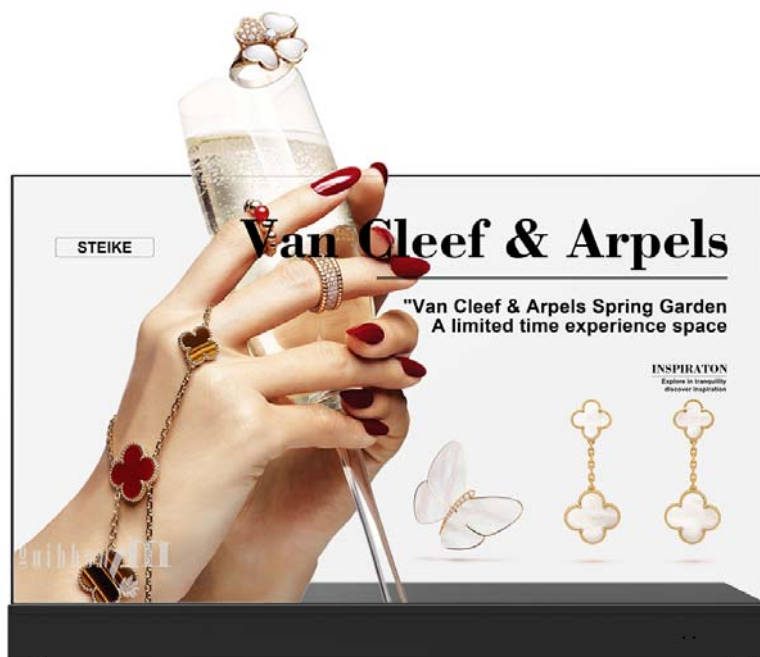

## A.Specification Parameters

|                                                                           |                                                                                                   |
|---------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------|
| Display                                                                   |                                                                                                   |
| display size                                                              | 77 寸                                                                                              |
| Backlight type                                                            | OLED                                                                                              |
| display resolution                                                        | 3840*2160                                                                                         |
| display ratio                                                             | 16 : 9                                                                                            |
| brightness                                                                | 200-600cd/m <sup>2</sup> automatic adjustment                                                     |
| contrast                                                                  | 150000 : 1                                                                                        |
| viewing angle                                                             | 178°/178                                                                                          |
| response time                                                             | 1ms(Gray To Gray)                                                                                 |
| color depth                                                               | 10bit(R),1.07 billion colors                                                                      |
| interface                                                                 |                                                                                                   |
| input interface                                                           | USB 2.0*1 + USB 3.0*1+HDMI*2+RJ45*1                                                               |
| power parameters                                                          |                                                                                                   |
| power input                                                               | AC 100-240V                                                                                       |
| total power consumption                                                   | < 600W                                                                                            |
| working environment                                                       |                                                                                                   |
| operating time                                                            | 7*12h(dynamic playback)                                                                           |
| overall service life                                                      | 30000h                                                                                            |
| operating temperature                                                     | 0°C~40°C                                                                                          |
| operating humidity                                                        | 20%~80%                                                                                           |
| structure                                                                 |                                                                                                   |
| material                                                                  | Tempered glass + Aluminum profile                                                                 |
| external dimensions                                                       | 1713.26*360*1112.5(mm) For detailed dimensions, please refer to the structural dimension diagram. |
| packaging dimensions                                                      | TBD                                                                                               |
| installation method                                                       | Base installation                                                                                 |
| Net Weight/ Gross Weight                                                  | TBD                                                                                               |
| List of Accessories                                                       |                                                                                                   |
| Power Cable、HDMI Cable、Remote Control、Quality Certificate & Warranty Card |                                                                                                   |
| other                                                                     |                                                                                                   |
| After-sales Service                                                       | One-year Warranty                                                                                 |

## B.Structural Dimension Diagram

